

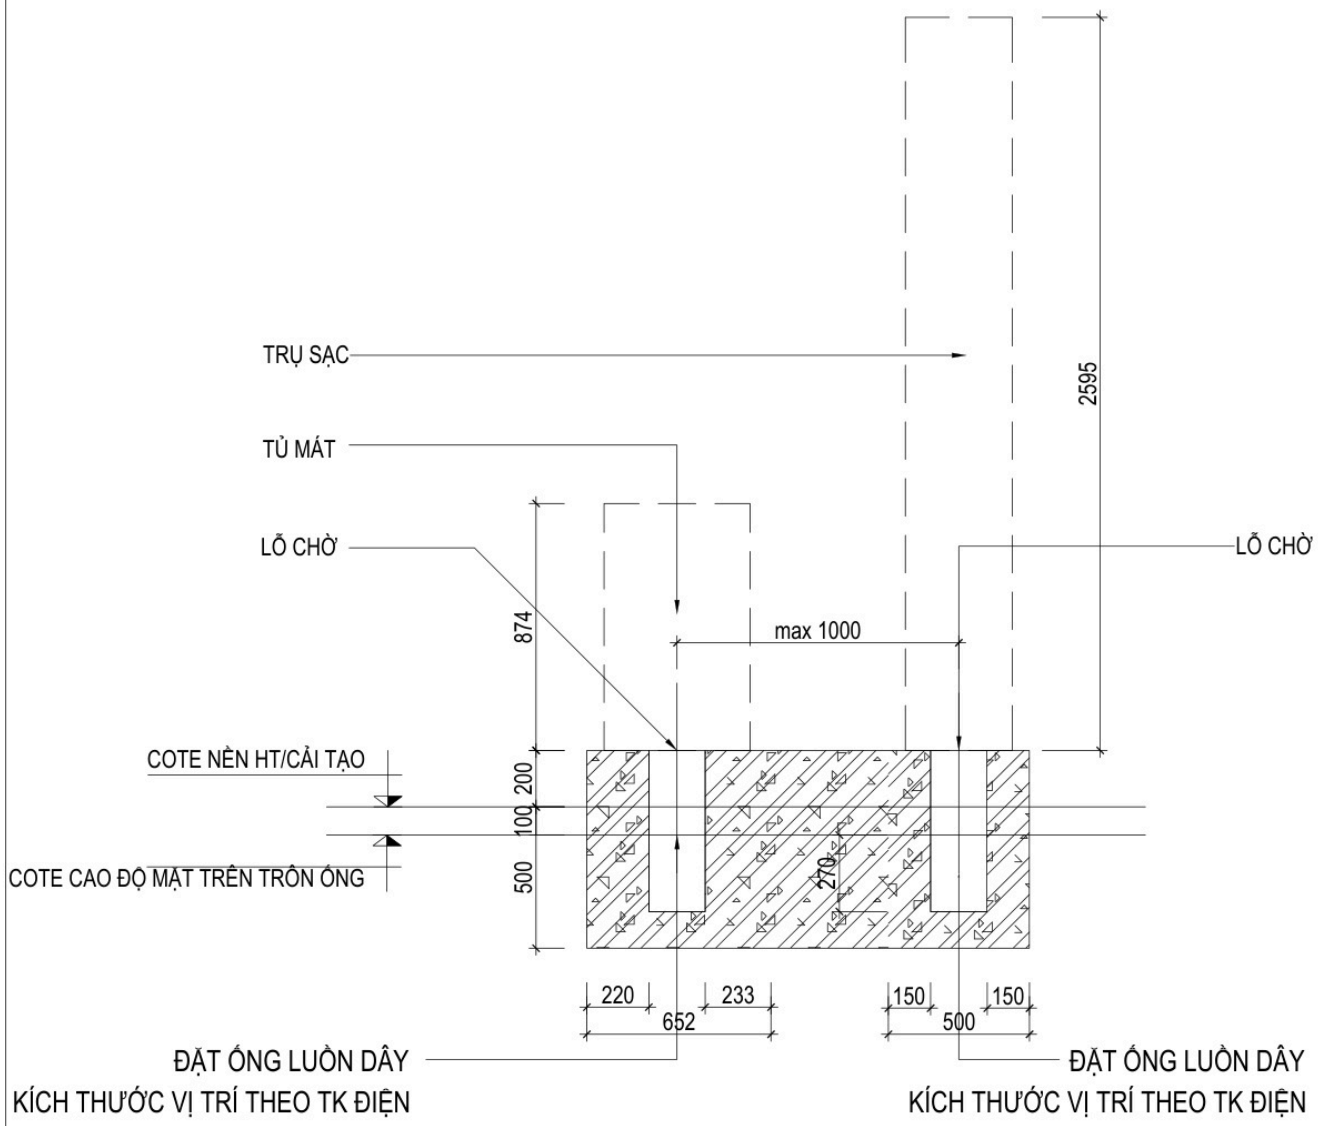


MẶT CẮT ĐẾ TRỤ SẠC+ TỦ LÀM MÁT(DÙNG CHO TRỤ 300KW)

TỈ LỆ : 1/50


Rectifier cabinet	Model	Nova 360
	Input Rating	400Vac±10%, 3-Phase, 50/60 Hz, 2 x (L1+L2+L3+N+PE)
	Power factor	0.99 at nominal output power
	Current THD	≤5% at nominal output power
	Efficiency Rectifier	≥95% at nominal output power
	Output channel	Up to 6 channels
	Output Voltage	200-1000Vdc
	DC Output Current	Up to 500A per channel
	DC Output Power	360kW max.
	Push Buttons	Emergency stop button
	Network Interface	Ethernet to user unit
	Operating Temperature	-30°C-55°C (Derating over 50°C)
	Storage Temperature	-40°C-70°C
	Humidity	5%-95% no condensation
	Altitude	≤3000m (Derating over 2000m)
	Ingress Protection	IP54
	Enclosure Protection	IK10
	Cooling	Forced air
	Dimension (WxHxD) Maximum outer size	1564*1993*1180mm
	Footprint	1500*900mm
	Installation	Basement
	Certificate	CE (Q4 2020)

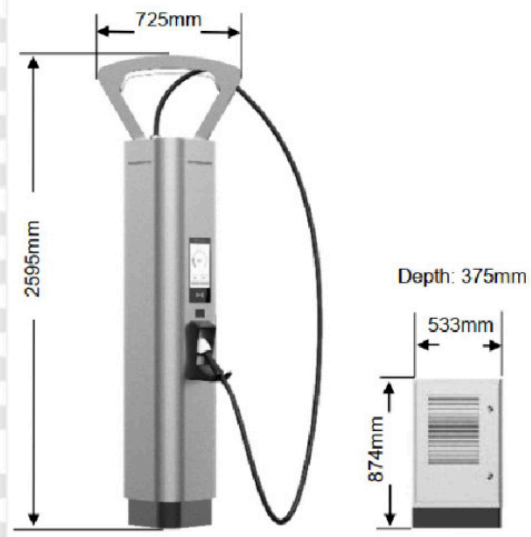

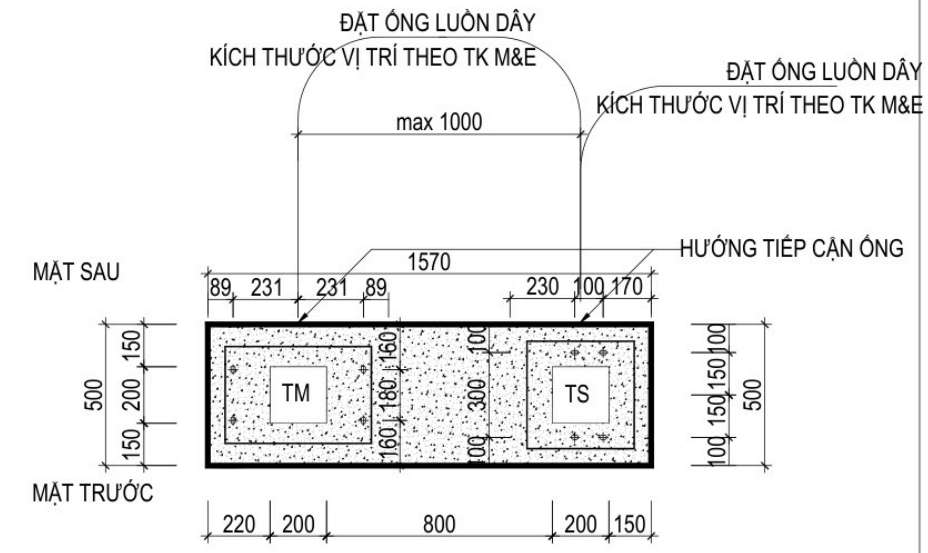

P.A 1: ĐẾ TRỤ SẠC+ TỦ LÀM MÁT LIỀN NHAU

TỈ LỆ : 1/50

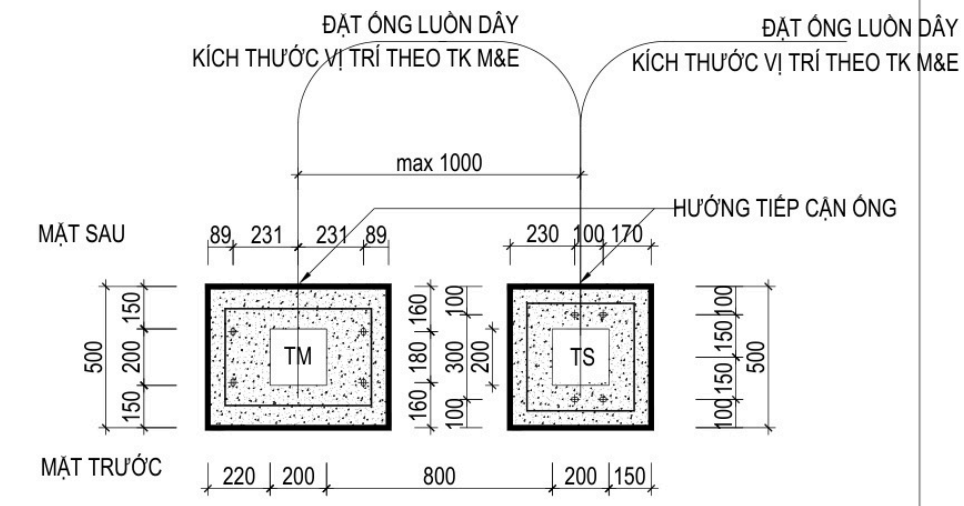

P.A 2: ĐẾ TỦ ĐIỆN KHÔNG LIỀN NHAU

TỈ LỆ : 1/50

- ĐẾ BÊ TÔNG MÁC 250# - TRÁT HOÀN THIỆN,
- MÀU SẮC: SƠN JOTUN MÀU GHI XÁM 9911- HOẶC TƯƠNG ĐƯƠNG (1 LỚP LÓT, 2 LỚP MÀU)
-KÍCH THƯỚC : THEO CHI TIẾT MẶT BẰNG
PHẦN MÓNG BÊ TÔNG ÂM
- Ở GIỮA CÓ ĐẶT ỐNG CHỜ DÂY ĐIỆN THEO THIẾT KẾ ĐIỆN
- SỬ DỤNG BU LÔNG M12 ĐỂ LẮP ĐẶT TRỤ
-NẾU HIỆN TRẠNG LÀ NỀN ĐẤT, ASPHAL..V..V : BÊ TÔNG MÓNG CAO 600mm
(XEM THÊM BẢN VẼ KC)