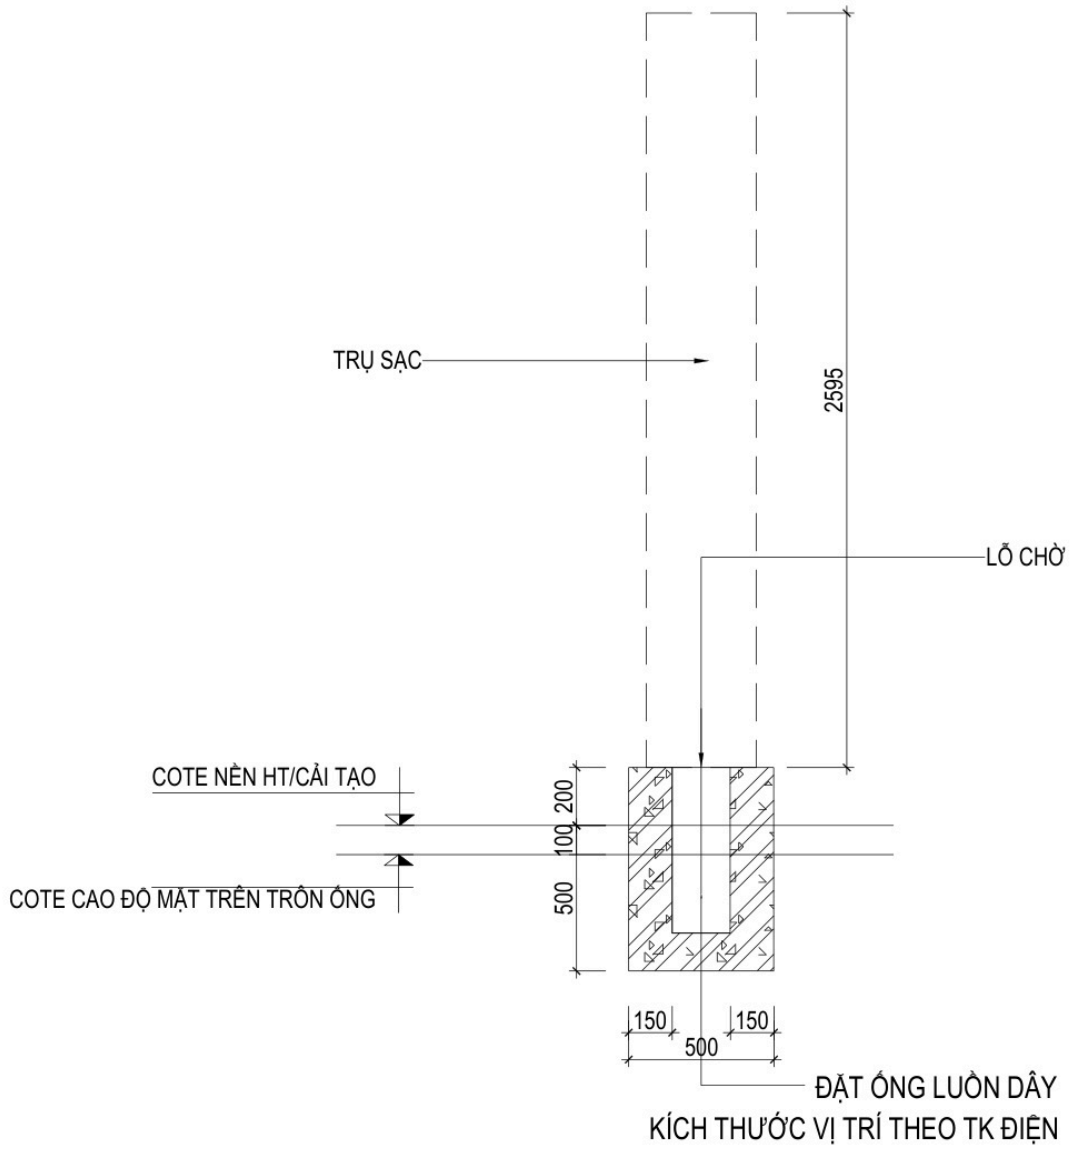


MẶT CẮT ĐẾ TRỤ SẠC (DÙNG CHO TRỤ 300KW - 2 SÚNG)

TỈ LỆ : 1/50


Output Power	360kW max.	
Output Voltage	200-1000Vdc	
Output Current	500A max.	200A max./connector
Simultaneous Charging	N/A	Yes
Display	10.1 inches touch screen	
Support Language	English (Other languages available upon request)	
Button and Switch	Emergency Button	
RFID Reader	ISO/IEC 14443 A/B, ISO/IEC 18092, IEC/ISO 15693	
Network Interface	4G/Wi-Fi for backend connection and Ethernet for Power Cabinet local connection	
Protocol (EVSE&Backend)	OCPP 1.6J	
Protocol (EVSE&EV)	DIN 70121, ISO 15118	
Operating Temperature	-30℃ to 50℃	
Storage Temperature	-40℃ to 70℃	
Humidity	5% to 95% no condensation	
Altitude	≤3000m above sea level (Derating over 2000m)	
IP Rating	IP55	
IK Rating	IK10 (Screen is IK08)	
Cooling	Liquid Cooling	Natural Cooling
Charging Cable Length	Liquid cooling_4.5m /Natural cooling_5m or 7m(optional)	
Dimensions (WxHxD)	User unit: 725*2597*504mm (Footprint: 400*400mm) Liquid cooling box: 533*878*375mm (Footprint: 518*343mm)	User unit: 725*2597*504mm (Footprint: 400*400mm)
Weight	User unit: approx. 175kg Liquid cooling box: approx. 62kg	User unit: approx. 182kg
Installation	Ground mounting	

- ĐẾ BÊ TÔNG MÁC 250# - TRÁT HOÀN THIỆN,
- MÀU SẮC: SƠN JOTUN MÀU GHI XÁM 9911- HOẶC TƯƠNG ĐƯƠNG (1 LỚP LÓT, 2 LỚP MÀU)
-KÍCH THƯỚC : THEO CHI TIẾT MẶT BẰNG

PHẦN MÓNG BÊ TÔNG ÂM

- Ở GIỮA CÓ ĐẶT ỐNG CHỜ DÂY ĐIỆN THEO THIẾT KẾ ĐIỆN
- SỬ DỤNG BU LÔNG M12 ĐỂ LẮP ĐẶT TRỤ
-NẾU HIỆN TRẠNG LÀ NỀN ĐẤT, ASPHAL..V..V : BÊ TÔNG MÓNG CAO 600mm

(XEM THÊM BẢN VẼ KC)

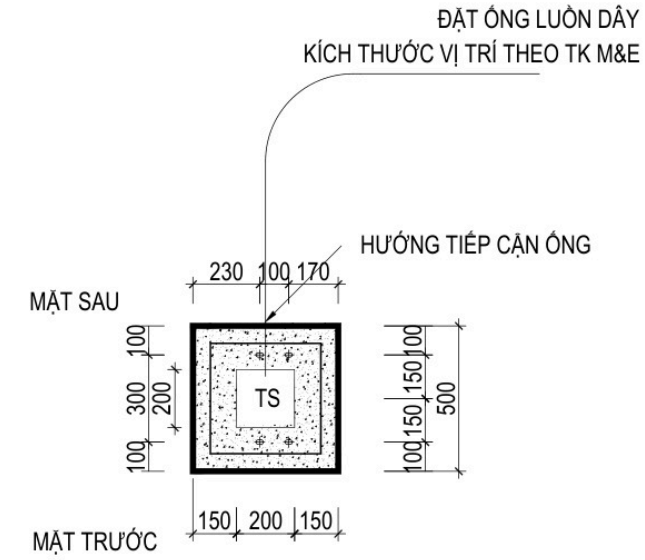

P.A 2: ĐẾ TỦ ĐIỆN KHÔNG LIỀN NHAU

TỈ LỆ : 1/50

